


TAMPER
BT 60, BT 65, BVT 65

PERFORMANCE DATA

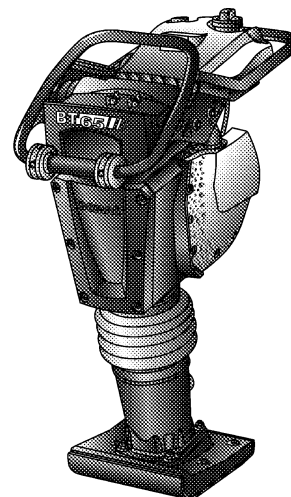

Machine type	Compaction output (m3/h)		
	Gravel, sand	Mixed soil	Silt, clay
BT 60	9-13	7-11	6-9
BT 65	13-17	8-12	7-10
BVT 65	13-17	8-12	7-10

Technical Data

Shipping dimensions in m3


BT 60	0,262
BT 65	0,262
BVT 65	0,262

Standard Equipment

- ☒ Engine Protection System
 - Protective engine covering
 - Two-stage double air filter system (BT)
 - Automatic oil level control
 - Dual fuel filter system
- ☒ Vibration insulated steering bow
- ☒ Self-cleaning air filter housing
- ☒ Protective covering
- ☒ Single point lifting device
- ☒ Recoil starter
- ☒ Carrying handles
- ☒ Plastic castor as loading aid
- ☒ Infinitely variable frequency
- ☒ Combination of engine stop/fuel switch
- ☒ h-/ rpm meter (BT)
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Transport device with puncture proof wheels
- ☐ Tamper foot widths (160-330mm)
- ☐ Tamper foot extensions
- ☐ h-/ rpm meter (BVT)
- ☐ Special painting
- ☐ Tool kit
- ☐ Service Kit



Dimensions in mm

	B	H	L	L1	W
BT 60	350	1030	728	335	230
BT 65	350	1030	728	335	280
BVT 65	350	1030	728	335	280

Technical Data

Weights

Operating weight CECE	kg	58
Basic weight	kg	57

Dimensions

Working width (tamper plate)	mm	230
------------------------------------	----	-----

Driving Characteristics

Working speed max.	m/min	20
Area coverage max.	m ² /h	276

Drive

Engine manufacturer	Honda
Type	GX 100
Emission stage	3
Cooling	air
Number of cylinders	1
Performance ISO 9249	kW 2,3
Speed	min-1 4.200
Fuel	gasoline
Drive system	mech.

Exciter system

Frequency	Hz	10- 11,8
Impact force	kN	15,0

Capacities

Fuel	l	3,0
------------	---	-----

BOMAG BT 60

BOMAG BT 65

BOMAG BVT 65

58
57

68
67

65
64

230

280

280

20

20

20

276

336

336

Honda
GX 100
3
air
1
2,3
4.200
gasoline
mech.

Honda
GX 100
3
air
1
2,3
4.200
gasoline
mech.

Honda
GX 100
3
air
1
2,3
4.200
gasoline
mech.

10- 11,8
15,0

10- 11,8
17,0

10- 11,8
16,0

3,0

3,0

3,0

Technical modifications reserved. Machines may be shown with options.



PRE 541 10 001

280213 Sa

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

